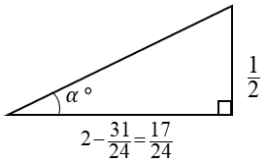
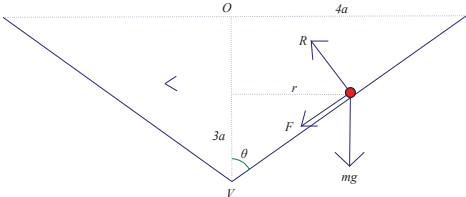



1a	$-\frac{mgR^2}{2x^2} = mv \frac{dv}{dx}$	M1	Form differential equation in v and x only. Need to see $\frac{dv}{dx}$ or $v \frac{dv}{dx}$ Cannot get this mark using t . Allow with both m 's cancelled. Condone sign error.
	$-\frac{gR^2}{2} \int \frac{1}{x^2} dx = \int v dv$	M1	Separate variables correctly and integrate at least one side. Cannot get this mark using t . Condone sign error.
	$v^2 = \frac{gR^2}{x} + C \quad *$	A1*	Obtain given answer from correct work. Must include at least one line of working between integral and final answer. Correct signs seen throughout working. Condone $\frac{v^2}{2} = \frac{gR^2}{2x} + C$ followed by $v^2 = \frac{gR^2}{x} + C$ Note: If the first line of working is $\frac{1}{2}v^2 = -\int \frac{gR^2}{2x^2} dx$ followed by integration of RHS, this scores M0M1A0*
ALT1 (a)	$\frac{1}{2}mu^2 - \frac{1}{2}mv^2 = \int \frac{gmR^2}{x^2} dx$	M1	Form an energy equation with 2 KE terms and the integral of the variable force. Condone sign errors.
	$\frac{1}{2}mu^2 - \frac{1}{2}mv^2 = -\frac{gmR^2}{x} + A$	M1	Integrate the force wrt x . Condone sign errors.
	$v^2 = \frac{gR^2}{x} + C \quad *$	A1*	Obtain given answer from correct work. Must include at least one line of working and correct signs seen throughout working.
		[3]	
b	$x = 3R, v^2 = 3gR$	M1	Use initial conditions to evaluate C in the given answer.
	$\Rightarrow C = 3gR - \frac{gR^2}{3R} \left(= \frac{8gR}{3} \right)$	A1	Or equivalent
	$x = R \Rightarrow v = \sqrt{\frac{11gR}{3}}$	A1	Accept $\frac{\sqrt{33gR}}{3}$ Answer must be in terms of g and R
		[3]	
ALT1 (b)	Use of definite integral instead of finding $+ C$		
	$\left[v^2 \right]_{\sqrt{3gR}}^v = \left[\frac{gR^2}{x} \right]_{3R}^R$	M1	Use initial conditions in a definite integral.

	$v^2 - 3gR = \frac{gR^2}{R} - \frac{gR^2}{3R}$	A1	Or equivalent
	$v = \sqrt{\frac{11gR}{3}}$	A1	Accept $\frac{\sqrt{33gR}}{3}$ Answer must be in terms of g and R
		(6)	

2a	Change in GPE $= mg \times 1.3l \sin \theta (= 0.5lmg)$	M1	Condone sin / cos confusion
	$EPE = \frac{\lambda l^2}{2l}$ or $EPE = \frac{\lambda (0.3l)^2}{2l}$	B1	One correct term for EPE
	Energy equation <i>B</i> to <i>A</i>	M1	Dimensionally correct with all the required terms. Condone sign errors and sin / cos confusion
	$\frac{\lambda l^2}{2l} - \frac{\lambda (0.3l)^2}{2l} = 0.5lmg$	A1	Correct unsimplified equation
	$\Rightarrow \lambda = mg \frac{1}{1-0.09} = \frac{100}{91} mg$	A1*	Obtain given answer from correct working. Must see evidence of simplification.
		[5]	
2b	Equation of motion	M1	Dimensionally correct with all the required terms. Condone sign errors and sin/cos confusion.
	$T - mg \sin \theta = ma$	A1	Correct unsimplified equation
	$\frac{\lambda \times l}{l} - mg \sin \theta = ma$ $\left(\frac{100}{91} mg - \frac{5}{13} mg = ma \right)$	A1	Correct unsimplified equation with HL used to replace <i>T</i>
	$a = \frac{5}{7} g$	A1	Accept 0.71g or better. If $g = 9.8$ is used, accept 7.
	Note: If $g = 9.81$ is used then penalise once per complete question. SHM equations can only be used if the motion is proven to be SHM first.		
		[4]	
		(9)	

3a	Moment of S about the y -axis	M1	Use of formula $(\pi)(\rho) \int xy^2 dx$ No need to see the correct limits here. The curve equation must be substituted correctly and an attempt to integrate seen (at least one term must have a power of x raised by 1) Note the correct expression for integrating is $x \left(\frac{1}{4} x(3-x) \right)^2 = \frac{1}{16} x^3 (3-x)^2$ $= \frac{1}{16} (9x^3 - 6x^4 + x^5)$
	$= (\pi)(\rho) \frac{1}{16} \left[\frac{9}{4} x^4 - \frac{6}{5} x^5 + \frac{1}{6} x^6 \right]$	A1	Correct integrated expression.
	$= \frac{31}{60} (\pi)(\rho)$	A1	Correct use of correct limits (0 and 2). No need to see a line of working showing substitution of limits. However, must see $\frac{31}{60}$ or equivalent numerical evaluation of integral.
	$\bar{x} = \frac{\frac{31}{60} (\pi)(\rho)}{\frac{2}{5} (\pi)(\rho)}$	M1	Complete method to find the distance. Formula must be the right way up $\bar{x} = \frac{(\pi)(\rho) \int xy^2 dx}{M}$ Must have consistent use of π and of ρ .
	$= \frac{31}{24} *$	A1*	Obtain given answer from correct working
		[5]	
3b	Correct use of trig 	M1	Correct trig ratio to find a relevant angle, α° or $(90 - \alpha)^\circ$ Must use curve equation with $x = 2$ and $\left(2 - \frac{31}{24}\right)$
	$\tan \alpha^\circ = \frac{1}{2} \div \frac{17}{24} \left(= \frac{12}{17} \right)$	A1	Or equivalent. Condone reciprocal.
	$\alpha = 35$	A1	2 sf or better (35.2175...) A0 for use of radians.
		[3]	
		(8)	

4			If angle is between incline and vertical then $\sin \theta = \frac{4}{5}$, $\cos \theta = \frac{3}{5}$
	Resolve vertically	M1	Need all terms. Dimensionally correct. Condone sign errors and sin/cos confusion.
	$R \sin \theta = mg + F \cos \theta$	A1 A1	Unsimplified equation with at most one error. Correct unsimplified equation
	Equation for horizontal motion	M1	Need all terms. Dimensionally correct. Condone sign errors and sin/cos confusion. Accept any form of acceleration for the method mark only.
	$R \cos \theta + F \sin \theta = mr\omega^2$	A1 A1	Unsimplified equation with at most one error. Direction of F consistent with vertical resolution. Incorrect form of acceleration is one error. Correct unsimplified equation
	Use of $F = \mu R$	M1	Used, not just quoted. $F = \frac{1}{4}R$
	Substitute for trig and solve for max ω	DM1	Dependent on all preceding M marks. If more than two equations are produced, the correct two must be used. $\left(R = \frac{20mg}{13}, F = \frac{5mg}{13} \right)$
	$\Rightarrow \omega = \sqrt{\frac{16g}{13r}}$	A1*	Obtain given answer from correct working.
		[9]	
		(9)	
Alt1	Using N2L parallel and perpendicular to the incline. Perpendicular $R - mg \sin \theta = mr\omega^2 \cos \theta$ Parallel $F + mg \cos \theta = mr\omega^2 \sin \theta$	M1 A1A1 M1 A1A1	Need all terms. Dimensionally correct. Condone sign errors and sin/cos confusion. Note that the acceleration must have a sin/cos component. Accept any form of acceleration for the method mark only. Mark A's as above. A1A0 Unsimplified equation with at most one error A1A1 Correct unsimplified equation

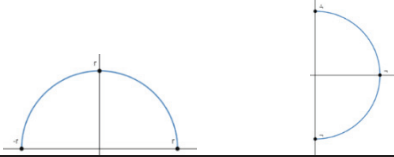5			Curve equation $x^2 + y^2 = r^2$
5a	Using x -axis $(\rho) \int x \times 2\sqrt{r^2 - x^2} \, dx$ or Using y -axis $(\rho) \frac{1}{2} \int 2(\sqrt{r^2 - x^2})^2 \, dx$	M1	Use of correct integral. Limits not needed here. Accept an integral of the form: x -axis: $k \int x\sqrt{r^2 - x^2} \, dx$ y -axis: $k \int r^2 - x^2 \, dx$
	x -axis $= -\frac{2}{3}(\rho)(r^2 - x^2)^{\frac{3}{2}}$ y -axis $= (\rho) \left(xr^2 - \frac{x^3}{3} \right)$	A1	Correct integration, ignore limits. Correct expression.
	$= \frac{2}{3}(\rho)r^3$	A1	Correct use of limits, 0 and r or $-r$ and r .
	Using x -axis $\frac{1}{2} \pi r^2 \rho \bar{x} = \rho \int_0^r 2xy \, dx$ Using y -axis $\frac{1}{2} \pi r^2 \rho \bar{y} = \rho \frac{1}{2} \int_{-r}^r y^2 \, dx$ or $\frac{1}{2} \pi r^2 \rho \bar{y} = \rho \int_0^r y^2 \, dx$	M1	Complete method to obtain distance. Use of a correct formula, consistent with the axis and limits used, to find centre of mass with curve equation. ρ must appear on both sides or neither.
	$\bar{x} = \frac{\frac{2}{3}r^3}{\frac{1}{2}\pi r^2} = \frac{4r}{3\pi} \quad *$	A1*	Obtain given answer from correct working
ALT 1 5(a)	Parametric approach $x = r \cos \theta, \quad y = r \sin \theta$		Curve equation $x^2 + y^2 = r^2$
	Using x -axis $2r^3 \int_0^{\frac{\pi}{2}} \sin^2 \theta \cos \theta \, d\theta$	M1	Use of correct integral. Limits not needed here. Accept an integral of the form: $kr^3 \int \sin^2 \theta \cos \theta \, d\theta$

	$= 2r^3 \left[\frac{\sin^3 \theta}{3} \right]_0^{\frac{\pi}{2}}$				A1	Correct integration, ignore limits. Correct expression.
	$= \frac{2}{3} r^3$				A1	Correct use of limits
	$\bar{x} = \frac{\frac{2}{3} r^3}{\frac{1}{2} \pi r^2}$				M1	Complete method to obtain distance. Use of correct formula. ρ must appear on both sides or neither.
	$= \frac{4r}{3\pi} *$				A1*	Obtain given answer from correct working
					[5]	
ALT 2 5(a)	Using y-axis $r^3 \int_0^{\frac{\pi}{2}} \sin^3 \theta \, d\theta$				M1	Use of correct integral. Limits not needed here. Accept an integral of the form: $kr^3 \int \sin^3 \theta \, d\theta$
	$r^3 \int_0^{\frac{\pi}{2}} (1 - \cos^2 \theta) \sin \theta \, d\theta$ $= r^3 \left[-\cos \theta + \frac{\cos^3 \theta}{3} \right]_0^{\frac{\pi}{2}}$				A1	Correct integration, ignore limits. Correct expression.
	$= \frac{2}{3} r^3$				A1	Correct use of limits
	$\bar{x} = \frac{\frac{2}{3} r^3}{\frac{1}{2} \pi r^2}$				M1	Complete method to obtain distance. Use of correct formula. ρ must appear on both sides or neither.
	$= \frac{4r}{3\pi} *$				A1*	Obtain given answer from correct working
					[5]	
5b		large	Small removed	Small added		
	mass	$8\pi a^2$	$2\pi a^2$	$2\pi a^2$	B1	Correct mass ratios
	From AC	$\frac{16a}{3\pi}$	$\frac{8a}{3\pi}$	$(-)\frac{8a}{3\pi}$	B1	Correct distances
	Moments about AC				M1	All terms required. Dimensionally correct or equivalent for a parallel axis. Condone sign errors. If column vectors are used, this mark is awarded once the equation is written separate to the column vectors.

	$8\pi a^2 \times \frac{16a}{3\pi} - 2\pi a^2 \times \frac{8a}{3\pi} - 2\pi a^2 \times \frac{8a}{3\pi}$ $= 8\pi a^2 d$	A1	Correct unsimplified equation.
	$\frac{96a}{3\pi} = 8d \Rightarrow d = \frac{4a}{\pi} *$	A1*	Obtain given value from correct working. Need to see at least some simplification.
		[5]	
5c	Moments about perpendicular axis through A	M1	Dimensionally correct. Need all terms. Or equivalent for a parallel axis
	From A $4a \times 8\pi a^2 - 2a \times 2\pi a^2 + 6a \times 2\pi a^2 = 8\pi a^2 \bar{x}$	A1ft A1ft	Unsimplified equation with at most one error. Correct unsimplified equation Follow their mass ratio
	$\Rightarrow \bar{x} = 5a$	A1	Correct only. If measured from B , distance is a
	Correct use of trig to find an expression for $\tan \theta$	M1	$\tan \theta = \frac{d}{\bar{x}}$ or $\tan \theta = \frac{\bar{x}}{d}$ where \bar{x} is distance from A .
	$\tan \theta = \frac{4}{5\pi}$	A1	Only
		[6]	
		(16)	

6a	In equilibrium	M1	Need all three forces. Dimensionally correct
	$mg + 4mg \frac{l-e}{l} = 4mg \frac{e}{l}$	A1	Unsimplified equation with at most one error
		A1	Correct unsimplified equation
	$5l = 8e \Rightarrow e = \frac{5l}{8},$ $AE = l + \frac{5l}{8} = \frac{13l}{8}$ *	A1*	Obtain given answer from correct working. Must see $AE =$
ALT1	$mg + 4mg \frac{(2l-AE)}{l} = 4mg \frac{(AE-l)}{l}$	M1	Need all three forces. Dimensionally correct
		A1	Unsimplified equation with at most one error
		A1	Correct unsimplified equation
	$AE = \frac{13l}{8}$ *	A1*	Obtain given answer from correct working. Must see $AE =$
ALT2	$mg + 4mg \frac{\left(\frac{l}{2} - e\right)}{l} = 4mg \frac{\left(\frac{l}{2} + e\right)}{l}$	M1	Need all three forces. Dimensionally correct
		A1	Unsimplified equation with at most one error
		A1	Correct unsimplified equation
	$e = \frac{l}{8}, \quad AE = l + \frac{l}{2} + \frac{l}{8} = \frac{13l}{8}$ *	A1*	Obtain given answer from correct working
		[4]	
6b	Equation of motion	M1	Need all terms. Dimensionally correct. Condone use of a for acceleration.
	$4mg \frac{\frac{5l}{8} + x}{l} - 4mg \frac{\frac{3l}{8} - x}{l} - mg = -m\ddot{x}$	A1	Unsimplified equation with at most one error.
		A1	Correct unsimplified equation Note: the question states x is measured vertically down.
	$\Rightarrow -m\ddot{x} = \frac{8mg}{l}x, \quad \ddot{x} = -\frac{8g}{l}x$ *	A1*	Obtain given answer from correct working. Must use \ddot{x}
		[4]	
6c	Use of $v^2 = \omega^2 (a^2 - x^2)$ with $a = \frac{3l}{8}$	M1	Or use of equivalent correct formula
	$= \frac{8g}{l} \left(\frac{9}{64}l^2 - \frac{1}{64}l^2 \right)$	A1	Correct unsimplified expression for v or v^2
	$v = \sqrt{gl}$	A1	Correct only
		[3]	

6d	$x = \frac{3l}{8} \cos \omega t$	B1	Use of relevant formula with correct amplitude $x = \frac{3l}{8} \cos \omega t$ or $x = \frac{3l}{8} \sin \omega t$
	Use of $-\frac{l}{8} = \frac{3l}{8} \cos \omega t$ or $\frac{l}{8} = \frac{3l}{8} \sin \omega t$ and correct use of $\frac{1}{2} \times \frac{2\pi}{\omega}$ or $\frac{l}{8} = \frac{3l}{8} \cos \omega t$ and correct use of $\pi - \cos^{-1}\left(\frac{1}{3}\right)$	M1	Complete method to find t or required time $t = \frac{1}{\omega} \cos^{-1}\left(-\frac{1}{3}\right)$ or $t = \frac{1}{\omega} \sin^{-1}\left(\frac{1}{3}\right)$ with $\frac{1}{2}$ period or $t = \frac{1}{\omega} \cos^{-1}\left(\frac{1}{3}\right)$ with π
	Required time $\frac{2}{\omega} \cos^{-1}\left(\frac{-1}{3}\right) = \sqrt{\frac{l}{2g}} \cos^{-1}\left(\frac{-1}{3}\right)$ or $\frac{\pi}{\omega} + \frac{2}{\omega} \sin^{-1}\left(\frac{1}{3}\right) = \sqrt{\frac{l}{8g}} \left(\pi + 2 \sin^{-1}\left(\frac{1}{3}\right) \right)$ or $\frac{2}{\omega} \left[\pi - \cos^{-1}\left(\frac{1}{3}\right) \right] = \sqrt{\frac{l}{2g}} \left[\pi - \cos^{-1}\left(\frac{1}{3}\right) \right]$	A1	Or equivalent, accept $1.91\sqrt{\frac{l}{2g}}, 1.35\sqrt{\frac{l}{g}}, 0.43\sqrt{l}$ $3.82\sqrt{\frac{l}{8g}}$ $\cos^{-1}\left(\frac{-1}{3}\right) = 1.91\dots$
		[3]	
		(14)	

7a	Conservation of mechanical energy:	M1	All terms required. Dimensionally correct $\cos \theta = \frac{5}{13}, \sin \theta = \frac{12}{13}$
	$\frac{1}{2}mu^2 = \frac{1}{2}mv^2 + mg(r + r \cos \theta)$	A1	Correct unsimplified equation
	$v^2 = u^2 - \frac{36}{13}gr$ *	A1*	Obtain given answer from correct working
		[3]	
7b	Equation of motion	M1	All terms required. Dimensionally correct. Condone sign errors and sin/cos confusion. Condone use of $R = 0$
	$R + mg \cos \theta = \frac{mv^2}{r}$	A1	Correct unsimplified equation. Condone (strict) inequality the right way round.
	Use $R \geq 0$ and solve for u^2	M1	Complete method to obtain u^2 Condone use of $R = 0$ or $R > 0$
	$\frac{mv^2}{r} - mg \cos \theta \geq 0$ * $\Rightarrow u^2 - \frac{36}{13}gr \geq \frac{5}{13}gr, u^2 \geq \frac{41}{13}gr$	A1*	Obtain given answer from correct working. Must have stated the inequality $R \geq 0$ If there is no reference to R , the max mark in (b) is M1A1M1A0*
		[4]	
7c	$BC = 2r \sin \theta = \frac{24}{13}r$	B1	Or equivalent $BC = 1.846...r$
	Relevant vertical motion Eg time to return to the level of BC	M1	Complete method vertically using <i>suva</i> t
	$t = \frac{2v \sin \theta}{g} = \frac{24v}{13g}$	A1	Correct unsimplified expression for time Accept $\frac{24}{13g} \times 4\sqrt{\frac{gr}{13}}, \frac{24}{13} \sqrt{\frac{16r}{13g}}$ $\frac{96}{13} \sqrt{\frac{r}{13g}}, 0.65\sqrt{r}$
	Relevant horizontal motion Eg distance travelled by P	M1	Complete method horizontally
	$= (v \cos \theta)t = v^2 \times \frac{120}{169g}$	A1	Correct unsimplified expression for distance $0.87r, \frac{1920}{2197}r, 0.0892gr$
	$= \frac{16gr}{13} \times \frac{120}{169g} = \frac{160r}{169} \times \frac{12}{13} < 2r \times \frac{12}{13}$	A1*	Obtain given conclusion from correct working

	hence falls into the bowl *		
ALT 1 for last 3 marks	Horizontal: time, T , required to travel the length BC	M1	Complete method horizontally
	$2r \sin \theta = v \cos \theta \times T$ $T = \frac{2r \frac{12}{13}}{4 \sqrt{\frac{gr}{13}} \times \frac{5}{13}} = 1.38 \sqrt{r}$	A1	Correct unsimplified expression for T
	$t < T$ since $0.654 \sqrt{r} < 1.38 \sqrt{r}$ hence falls into the bowl *	A1*	Obtain given conclusion from correct working
ALT 2 for last 3 marks	Horizontal: speed, V , required to reach C	M1	Complete method horizontally
	$-V \sin \theta = V \sin \theta - g \frac{2r \sin \theta}{V \cos \theta}$ $\Rightarrow V = \sqrt{\frac{gr}{\cos \theta}} = \sqrt{\frac{13gr}{5}}$	A1	Correct unsimplified expression for V
	$v < V$ since $\sqrt{\frac{13gr}{5}} < \sqrt{\frac{16gr}{13}}$ hence falls into the bowl *	A1*	Obtain given conclusion from correct working
	SC: If range formula is quoted correctly award M1A1M1A1. Range = $\frac{2v^2 \sin \theta \cos \theta}{g}$		
		[6]	
		(13)	